





YWF Series Axial Fan
With External Rotor Motor




YWF350

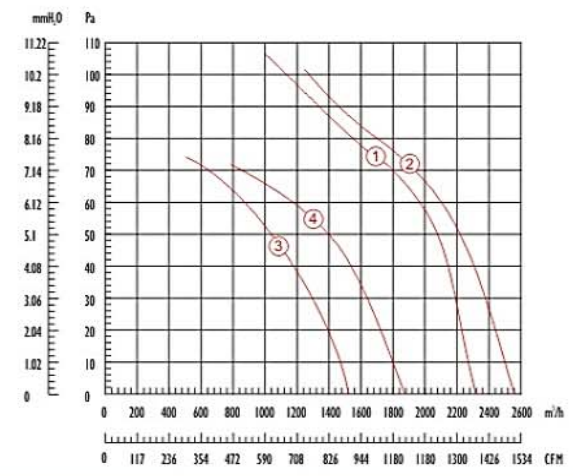

YWF400

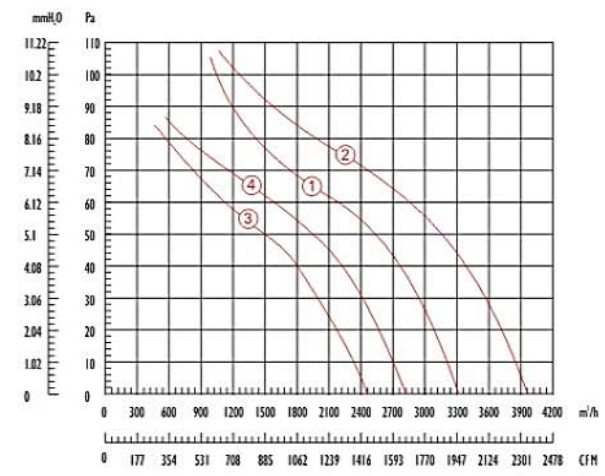

YWF450

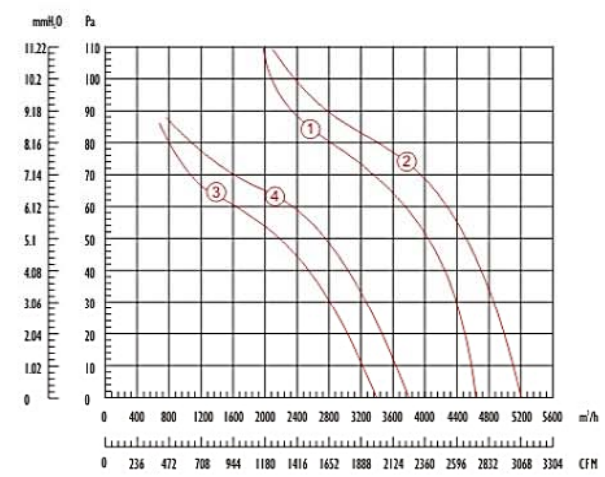

YWF350


型号 MODEL	额定电压 VOLTAGE V	频率 FREQUENCY Hz	额定电流 CURRENT A	输入功率 INPUT W	转速 SPEED RPM	最大风量 MAX AIR FLOW m³/h	电容 CAPACITOR µF	噪音 NOISE dB(A)	曲线 CURVE
YWF4D350	380	50	0.37	145	1380	2500	/	62	1
YWF4E350	220	50	0.65	145	1380	2500	4	62	1
YWF4E350	120	60	1.6	190	1600	2650	16	63	2
YWF6D350	380	50	0.3	90	950	1650	/	58	3
YWF6E350	220	50	0.35	90	950	1650	3	58	3
YWF6E350	120	60	0.7	105	1100	1900	8	60	4

YWF400

型号 MODEL	额定电压 VOLTAGE V	频率 FREQUENCY Hz	额定电流 CURRENT A	输入功率 INPUT W	转速 SPEED RPM	最大风量 MAX AIR FLOW m³/h	电容 CAPACITOR µF	噪音 NOISE dB(A)	曲线 CURVE
YWF4D400	380	50	0.53	190	1380	3500	/	68	1
YWF4E400	220	50	0.85	190	1380	3500	6	68	1
YWF4E400	120	60	2.3	270	1600	4000	22	69	2
YWF6D400	380	50	0.38	110	920	2510	/	58	3
YWF6E400	220	50	0.53	110	920	2510	4	58	3
YWF6E400	120	60	1.15	135	980	2750	12	59	4

YWF450

型号 MODEL	额定电压 VOLTAGE V	频率 FREQUENCY Hz	额定电流 CURRENT A	输入功率 INPUT W	转速 SPEED RPM	最大风量 MAX AIR FLOW m³/h	电容 CAPACITOR µF	噪音 NOISE dB(A)	曲线 CURVE
YWF4D450	380	50	0.61	250	1350	4850	/	68	1
YWF4E450	220	50	1.15	250	1350	4800	8	68	1
YWF4E450	120	60	2.6	330	1600	5260	32	70	2
YWF6D450	380	50	0.43	150	920	3550	/	60	3
YWF6E450	220	50	0.7	150	920	3550	6	60	3
YWF6E450	120	60	1.5	180	1050	3830	20	62	4

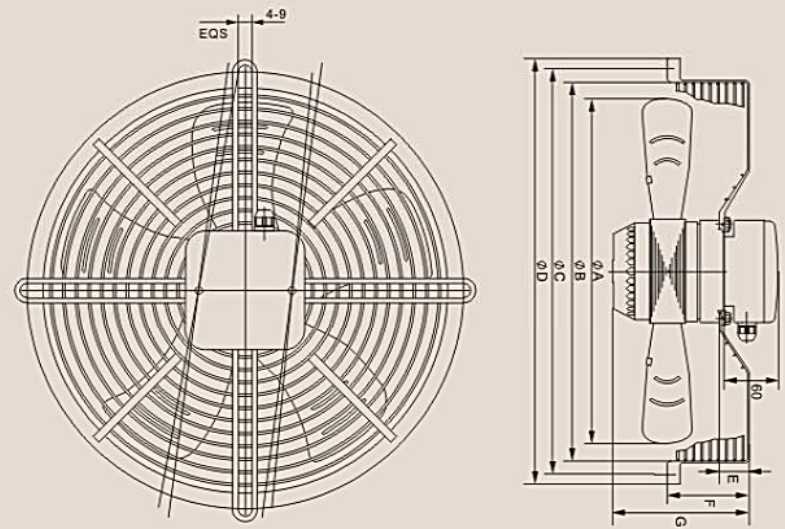

型号 MODEL	A	B	C	D	E	F	G
YWF350	350	370	420	440	30	80	135
YWF400	400	420	470	490	30	90	148
YWF450	450	470	520	545	30	90	160

LIONBALL - IO